
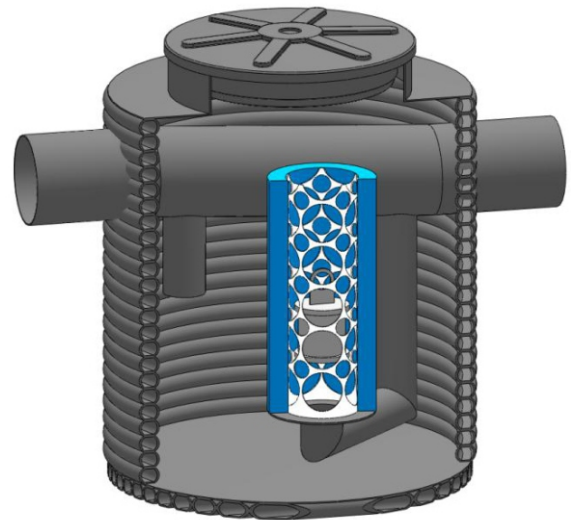


## Hydrocarbon separators with by-pass and coalescence insert **SKHP-B**

### Basic parameters

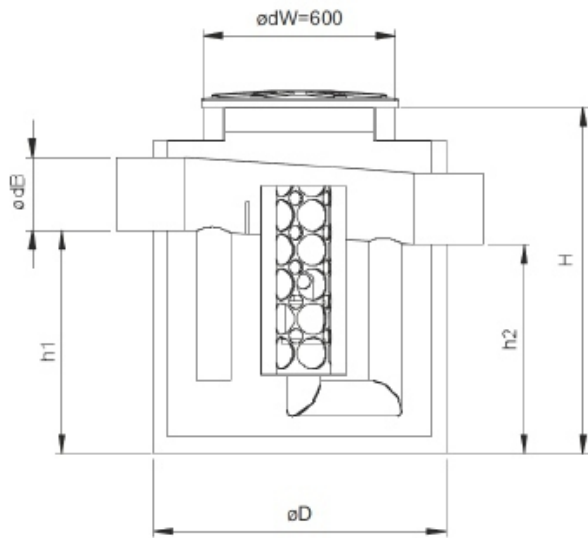

Model	Nominal Flow	Maximum Flow	Separator Diameter D	Height H	Height h1/h2	Inlet/Outlet Diameter	Manhole Diameter	Total Capacity
	[l/s]	[l/s]	[mm]	[mm]	[mm]	[mm]	[mm]	[m <sup>3</sup> ]
SKHP-B 1,5	1,5	15	910	1200	600/570	200	600	0,3
SKHP-B 3	3	30	1130	1380	730/700	250	600	0,55
SKHP-B 6	6	60	1130	1485	770/740	315	600	0,6
SKHP-B 8	8	80	1130	1695	980/950	315	600	0,8
SKHP-B 10	10	100	1290	1585	870/830	315	600	1
SKHP-B 15	15	150	1290	1870	1070/1030	400	600	1,2
SKHP-B 20	20	200	1290	2310	1420/1380	500	600	1,6
SKHP-B 25	25	250	1290	2620	1720/1680	500	600	1,9
SKHP-B 30	30	300	1630	2440	1540/1500	500	600	2,7
SKHP-B 35	35	350	1630	2580	1580/1540	600	600	2,8
SKHP-B 40	40	400	1630	2900	1900/1860	600	600	3,2

Individual solutions are also possible, guaranteeing higher capacities and higher flows.

At the customer's request it is possible to change the diameter of the connections.

Optional devices:

- additional extensions
- alarm systems